

Low Pressure limiter / Gauge saver Model PL2

Features


- Metal Compact design
- Diaphragm actuated for high sensitivity
- Protect Instrument form over pressure
- Limits the excessive pressure and sudden spike
- Viton Seal
- Blocks higher pressure exceeding set value until pressure returns to its normal value
- Isolate low pressure indicator from a system that requires to read alternatively low & high pressure.

Applications

Machine and apparatus construction
 Process plant, Power plant
 Chemical and Petrochemical Industries
 Off shore, on shore refineries and Mining

Permissible Pressure rating:
 400 kg/cm² @ 100°C (212°F)

General dimensions in mm

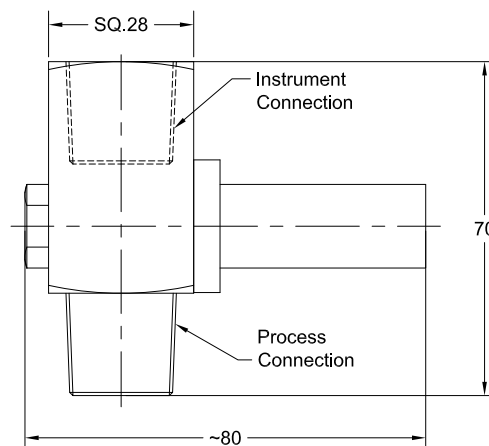

Order information

Type	Connection	Form ¹⁾	Wetted Parts	Adjustable range ²⁾ (mmWC)	Options
PL2	(04) 1/2" NPT (15) 1/2" BSP (16) M20x1.5 Others on request	M/F Male X female	(S) SS316L	(S) 400 to 600 (T) 1000 to 2500 (U) 4000 to 6000 (V) 6000 to 10000 (W) 10000 to 20000	(NH) Stamped tag (OF) Oil free Certificate (CD3) 3.1 Material Certi. (CD5) NACE Certificate

1) For Form, First character indicates Process connection and Second character indicates Instrument connection

2) Adjustable including for the end ranges

How to order

Type	Connection	Form	Wetted Parts	Range	Options	Certificate
PL2	04	M/F	S	V	NH	CD3

Precision Mass Products Pvt. Ltd.

Plot No.: 2306, G.I.D.C. Chhatral, Ta: Kalol, Dist.: Gandhinagar,
 Chhatral -382729, Gujarat, India.
 Telephone: +91-2764 233681/82/83 Fax: +91-2764-233440
 Email: sales@precisionmass.com www.precisionmass.com
 All specifications are subject to change without notice.

• North Zone : sales.delhi@precisionmass.com
 • East zone : sales.kolkata@precisionmass.com
 • West zone : sales.mumbai@precisionmass.com
 • South zone : sales.chennai@precisionmass.com
 IN.PL2 Rev. C 11/02/2026